




**0079894A7HT19**

110 Delta Drive  
 Pittsburgh, PA 15238  
 NAFTA Sales: (1)800-245-3984  
 HK Sales : (852)3102-9337  
 magnetics@spang.com

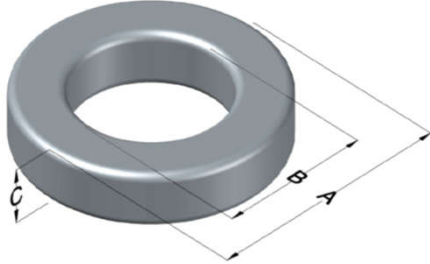

Kool M $\mu$ MAX Permeability ( $\mu$ )	A <sub>L</sub> (nH/T <sup>2</sup> )	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
60	120 $\pm$ 8%	XXXXXX	79894A7HT19	N/A	Black

Dimensions	Uncoated		Coated Limits			Packaging
	(mm)	(in)	(mm)	(in)		
OD (A)	26.92	1.060	27.69	1.090	max	Cardboard cut-outs Box Qty = TBD
ID (B)	14.73	0.580	14.10	0.555	min	
HT (C)	17.99	0.708	19.00	0.748	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100kHz, 100mT max (mW/cm <sup>3</sup> )	DC Bias min (oersteds)		Voltage Breakdown wire to wire min (V <sub>AC</sub> )	Break Strength min (kg)	Window Area W <sub>a</sub> (mm <sup>2</sup> )	Cross Section A <sub>e</sub> (mm <sup>2</sup> )	Path Length L <sub>e</sub> (mm)	Volume V <sub>e</sub> (mm <sup>3</sup> )	Est. Weight (g)
	80%	50%							
700	58	116	3000	77.0	156	107	63.5	6,790	46.2

Winding Information					Temperature Rating	
Winding Length Per Turn				Wound Coil Dimensions (mm)		Curie Temp: 500°C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor		Coating Temp (Continuous up to): 200°C
				OD	30.9	Notes:
0%	51.6	40%	58.9	HT	23.8	
				Max OD	30.9	
20%	55.2	45%	59.8	Max HT	28.6	
25%	56.2	50%	61.0	Surface Area (mm <sup>2</sup> )		
30%	56.9	60%	63.1	Unwound Core	3,400	
35%	57.9	70%	65.6	40% Winding Factor	4,400	

