




Specification for:

0C41407TC

110 Delta Drive
 Pittsburgh, PA 15238
 Phone: 412/696-1333
 Fax: 412/696-0333
 Email:magnetics@spang.com

DIMENSIONS

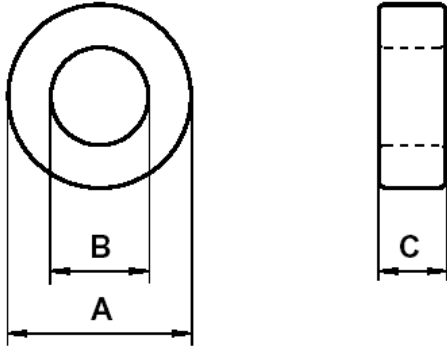

(mm)	Nominal:	Min:	Max:
O.D. (A)	12.7	12.44	12.96
I.D. (B)	7.35	6.88	7.82
Ht. (C)	4.78	4.65	4.91

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
12.4	30.0	374

INDUCTANCE

A _L value (nH/T ²)	Test conditions	
470 ± 25%	10 kHz	0.5 mT (For N = 5, use 1.56 mA), 25°C

ELECTRICAL LOSSES

tan δ / μ _i max	tan δ / μ _i Typ	Test conditions	
≤ 50 · 10 ⁻⁶	≤ 25 · 10 ⁻⁶	300 kHz	0.5 mT, 25°C
≤ 200 · 10 ⁻⁶	≤ 100 · 10 ⁻⁶	1000 kHz	

TEMPERATURE FACTOR

α _F	Test conditions
2.0 · 10 ⁻⁶ to -5.0 · 10 ⁻⁶ /°C	+20°C to +40°C
2.0 · 10 ⁻⁶ to -2.0 · 10 ⁻⁶ /°C	+40°C to +70°C

COATING

Uncoated
