


DIMENSIONS

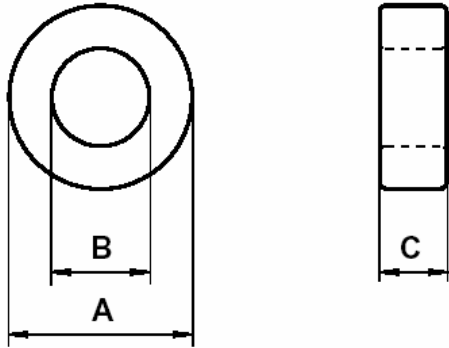

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	12.7	12.44	12.96
I.D. (B)	8.14	7.67	8.61
Ht. (C)	3.18	3.05	3.31

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
7.1	31.7	226

INDUCTANCE

AL value (nH/T ²)	Test conditions
894 ± 20%	10 kHz, 0.5 mT (For N = 5, use 0.1 mA), 25°C

CORE LOSSES

P _L max	Production lot limit Max avg	Test conditions
49.7 mW (220 mW/cm ³)	45.2 mW (200 mW/cm ³)	25 kHz, 200 mT, 100°C

COATING

Uncoated

NOTE

Spec. Modifications	Previous	Revised
2005.05.15	Nom ID = 7.92 Losses: General F Material	Nom ID = 8.14 Losses: Detail as indicated