




Specification for:

0F41305TC

110 Delta Drive
 Pittsburgh, PA 15238
 Phone: 412/696-1333
 Fax: 412/696-0333
 Email:magnetics@spang.com

DIMENSIONS

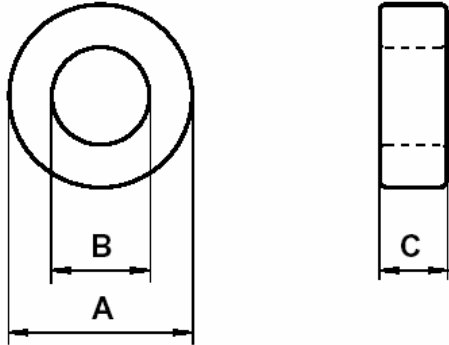

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	12.7	12.44	12.96
I.D. (B)	8.14	7.67	8.61
Ht. (C)	5.08	4.9	5.26

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
11.4	31.7	361

INDUCTANCE

AL value (nH/T ²)	Test conditions
1430 ± 20%	10 kHz, 0.5 mT (For N = 5, use 0.5 mA), 25°C

CORE LOSSES

P _L max	Production lot limit Max avg	Test conditions
79.4 mW (220 mW/cm ³)	72.2 mW (200 mW/cm ³)	25 kHz, 200 mT, 100°C
-	-	-

COATING

Uncoated

NOTE

Spec. Modifications	Previous	Revised
2006.01.13	Bare Nom ID = 7.92 Losses: General F Material	Bare Nom ID = 8.14 Losses: Detail as indicated