




Specification for:  
**0F47313TC**

110 Delta Drive  
Pittsburgh, PA 15238  
Phone: 412/696-1333  
Fax: 412/696-0333  
Email:magnetics@spang.com

**DIMENSIONS**

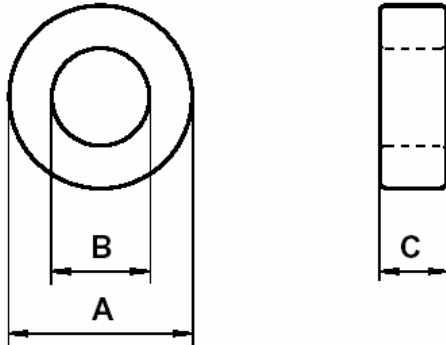

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	73.7	72.7	74.7
I.D. (B)	38.9	37.9	39.9
Ht. (C)	12.5	12.04	12.96

Eff. Parameters		
A <sub>e</sub> mm <sup>2</sup>	l <sub>e</sub> mm	V <sub>e</sub> mm <sup>3</sup>
210	165	34771

**INDUCTANCE**

AL value (nH/T <sup>2</sup> )	Test conditions
4880 ± 20%	10 kHz, 0.5 mT (For N = 5, use 0.45 mA), 25°C

**CORE LOSSES**

P <sub>L</sub> max	Production lot limit Max avg	Test conditions
8.3 W (239 mW/cm <sup>3</sup> )	7.5 W (217 mW/cm <sup>3</sup> )	25 kHz, 200 mT, 100°C
-	-	-

**COATING**

Uncoated
----------

**NOTE**

Spec. Modifications	Previous	Revised
2006.01.14	OD max = 46.68 Bare Nom Ht = 12.7 Losses: General F Material	OD max = 74.7 Bare Nom Ht = 12.5 Losses: Detail as indicated