


DIMENSIONS

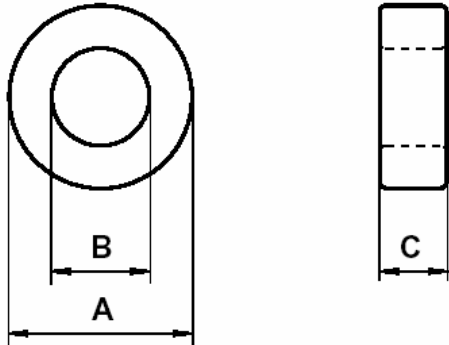

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	5.84	5.55	6.13
I.D. (B)	3.05	2.76	3.34
Ht. (C)	1.52	1.33	1.71

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
2.0	13	26.7

INDUCTANCE

A _L value (nH/T ²)	Test conditions	
980 ± 20%	10 kHz	0.5 mT (For N = 1, use 0.6 mA), 25°C
≥ 0.9 x A _L @ 10 kHz	200 kHz	

ELECTRICAL LOSSES

tan δ / μ _i	Test conditions
≤ 12 · 10 ⁻⁶	100 kHz, 0.5 mT, 25°C

COATING

Uncoated

NOTE

Spec. Modifications	Previous	Revised
2006.01.09	LF: General J Material	LF: Detail as indicated
2006.01.09	A _L value up to 200 kHz	A _L at 200 kHz ≥ 0.9 x A _L at 10 kHz