


**DIMENSIONS**

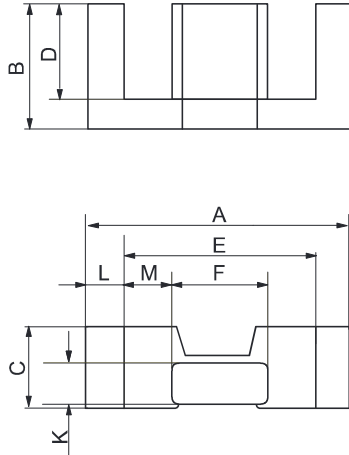

(mm)	Nominal:	Tol. min.:	Tol. max.:
<b>A</b>	25.0	-0.66	+ 0.66
<b>B</b>	12.5	-0.15	+ 0.15
<b>C</b>	9.1	-0.2	+ 0.2
<b>D</b>	9.05 Min.		
<b>E</b>	18.1 Min.		
<b>F</b>	11.4	-0.2	+ 0.2
<b>K</b>	5.2	-0.15	+ 0.15
<b>L</b>	3.15	-0.2	+ 0.2
<b>M</b>	3.65	-0.2	+ 0.2
Eff. Parameters			
<b>Ae mm<sup>2</sup></b>	<b>Amin mm<sup>2</sup></b>	<b>le mm</b>	<b>Ve mm<sup>3</sup></b>
58.0	55.0	57.0	3300

**INDUCTANCE**

AL value (nH)	Test conditions
Nom: 4507 Min.: 3380	10 kHz, < 0.5 mT, 25 °C

**MARKING**

No marking
------------

**LOSS FACTOR**

$\tan \delta / \mu$ ( $\times 10^{-6}$ )	Test conditions
< 20	100 kHz, < 0.25 mT, 25 °C

**NOTE**

Spec. modifications	Previous	Revised
2005-06-22	D=9.1 Min. Loss factor: General J material	D=9.05 Min. Loss factor: Detail as indicated