


DIMENSIONS

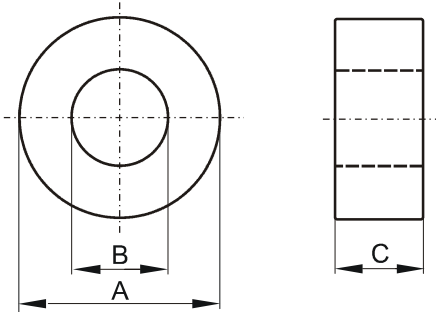

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	13.2	12.93	13.47
I.D. (B)	7.37	7.11	7.63
Ht. (C)	3.96	3.83	4.09
Eff. Parameters			
Ae mm²	le mm	Ve mm³	
11.2	30.6	343	

INDUCTANCE

AL value (nH/T ²)	Test conditions
1111 ± 25%	10 kHz, 0.5 mT (For N=5, use 0.57 mA), 25°C

CORE LOSSES

P _i max	Production lot limit Max avg	Test conditions
< 42.2 mW (< 123 mW/cm ³)	< 38.5 mW (< 112 mW/cm ³)	100 kHz, 100 mT, 100 °C

COATING

Uncoated

NOTE

Spec. modifications	Previous	Revised
2007-06-05	Losses: General P material	Losses: Detail as indicated