


**DIMENSIONS**

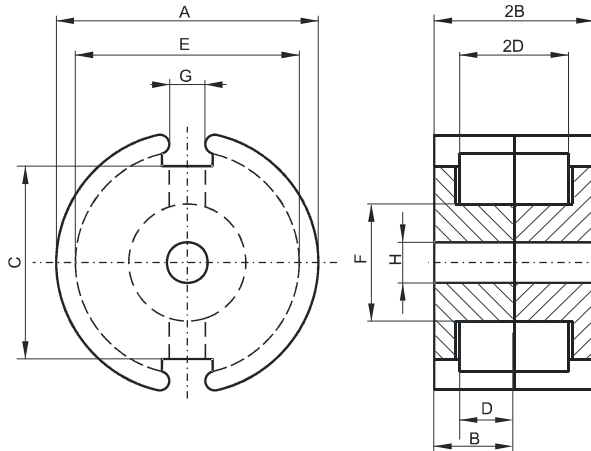

(mm)	Nominal:	Tol. min.:	Tol. max.:
<b>A</b>	18.0	-0.4	+ 0.4
<b>B</b>	7.1	-0.2	0.0
<b>2B</b>	14.2	-0.4	0.0
<b>C</b>	11.84	-0.25	+ 0.25
<b>D</b>	5.05	0.0	+ 0.2
<b>2D</b>	10.1	0.0	+ 0.4
<b>E</b>	14.0	0.0	+ 0.4
<b>F</b>	7.4	-0.3	0.0
<b>G</b>	3.6	0.0	+ 0.3
<b>H</b>	3.1	-0.08	+ 0.08
<b>Eff. Parameters</b>			
<b>Ae mm<sup>2</sup></b>	<b>Amin mm<sup>2</sup></b>	<b>le mm</b>	<b>Ve mm<sup>3</sup></b>
42.6	36.0	29.3	1248

**INDUCTANCE**

**MARKING**

AL value (nH/T <sup>2</sup> )	Test conditions	P
Nom: 3268 Min.: 2451	10 kHz, < 0.1 mT, 25 °C	UG

**CORE LOSSES**

P <sub>i</sub> max	Test conditions
< 0.14 W/set (< 112 mW/cm <sup>3</sup> )	100 kHz, 100 mT, 100 °C

**NOTE**

Spec. modifications	Previous	Revised