


**DIMENSIONS**

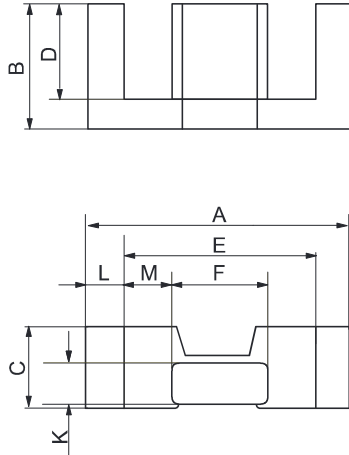

(mm)	Nominal:	Tol. min.:	Tol. max.:
<b>A</b>	20.0	-0.55	+ 0.55
<b>B</b>	10.0	-0.15	+ 0.15
<b>C</b>	6.65	-0.15	+ 0.15
<b>D</b>	7.7	-0.25	+ 0.25
<b>E</b>	15.4	-0.5	+ 0.5
<b>F</b>	8.9	-0.2	+ 0.2
<b>K</b>	3.6	-0.15	+ 0.15
<b>L</b>	0.0	0.0	0.0
<b>M</b>	0.0	0.0	0.0
Eff. Parameters			
Ae mm <sup>2</sup>	Amin mm <sup>2</sup>	le mm	Ve mm <sup>3</sup>
31.0	29.0	47.0	1460

**INDUCTANCE**

AL value (nH)	Test conditions
Nom: 1633 Min.: 1225	10 kHz, < 0.5 mT, 25 °C

**MARKING**

P EC
---------

**CORE LOSSES**

P <sub>i</sub> max	Test conditions
100 mW/cm <sup>3</sup> (0.146 W/set)	100 kHz, 100 mT, 100 °C