


**DIMENSIONS**

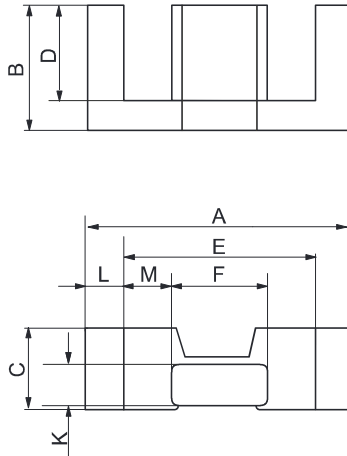

(mm)	Nominal:	Tol. min.:	Tol. max.:
<b>A</b>	25.0	-0.66	+ 0.66
<b>B</b>	12.5	-0.15	+ 0.15
<b>C</b>	9.1	-0.2	+ 0.2
<b>D</b>	9.05 Min.		
<b>E</b>	18.1 Min.		
<b>F</b>	11.4	-0.2	+ 0.2
<b>K</b>	5.2	-0.15	+ 0.15
<b>L</b>	3.15	-0.2	+ 0.2
<b>M</b>	3.65	-0.2	+ 0.2
Eff. Parameters			
Ae mm <sup>2</sup>	Amin mm <sup>2</sup>	le mm	Ve mm <sup>3</sup>
58.0	55.0	57.0	3300

**INDUCTANCE**

AL value (nH/T <sup>2</sup> )	Test conditions
Nom: 2280 Min.: 1710	10 kHz, < 0.5 mT, 25 °C

**MARKING**

P EC
---------

**CORE LOSSES**

P <sub>i</sub> max	Test conditions
115 mW/cm <sup>3</sup> (0.38 W/set)	100 kHz, 100 mT, 100 °C

**NOTE**

Spec. modifications	Previous	Revised
2005-06-22	D=9.1 Min. Losses: General P material	D=9.05 Min. Losses: Detail as indicated