


DIMENSIONS

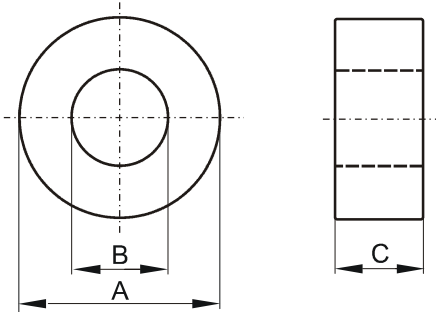

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	38.1	37.33	38.87
I.D. (B)	19.0	18.28	19.72
Ht. (C)	25.4	24.89	25.91
Eff. Parameters			
Ae mm²	le mm	Ve mm³	
233	82.8	19300	

INDUCTANCE

AL value (nH/T ²)	Test conditions
8762 ± 25%	10 kHz, 0.5 mT (For N=5, use 1.55 mA), 25°C

CORE LOSSES

P _i max	Production lot limit Max avg	Test conditions
< 2.37 W (< 123 mW/cm ³)	< 2.16 W (< 112 mW/cm ³)	100 kHz, 100 mT, 100 °C

COATING

Uncoated

NOTE

Spec. modifications	Previous	Revised
2007-06-05	Losses: General P material	Losses: Detail as indicated