


DIMENSIONS

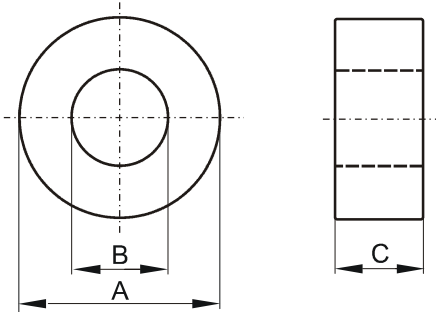

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	73.7	72.6	74.7
I.D. (B)	38.9	37.9	39.9
Ht. (C)	25.2	24.49	25.91
Eff. Parameters			
Ae mm²	le mm	Ve mm³	
423	165	70099	

INDUCTANCE

AL value (nH/T ²)	Test conditions
7470 ± 25%	10 kHz, 0.5 mT (For N=5, use 3.4 mA), 25°C

CORE LOSSES

P _i max	Production lot limit Max avg	Test conditions
< 9.32 W (< 132 mW/cm ³)	< 8.47 W (< 120 mW/cm ³)	100 kHz, 100 mT, 100 °C
< 60.6 W (< 858 mW/cm ³)	< 55.1 W (< 780 mW/cm ³)	100 kHz, 200 mT, 100 °C

COATING

Uncoated

NOTE

Spec. modifications	Previous	Revised
2007-06-05	Losses: General R material	Losses: Detail as indicated