


DIMENSIONS

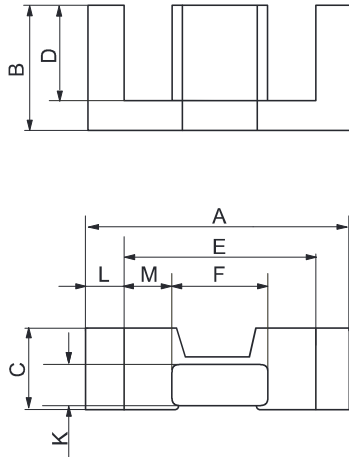

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	25.0	-0.66	+ 0.66
B	12.5	-0.15	+ 0.15
C	9.1	-0.2	+ 0.2
D	9.05 Min.		
E	18.1 Min.		
F	11.4	-0.2	+ 0.2
K	5.2	-0.15	+ 0.15
L	3.15	-0.2	+ 0.2
M	3.65	-0.2	+ 0.2
Eff. Parameters			
Ae mm²	Amin mm²	le mm	Ve mm³
58.0	55.0	57.0	3300

INDUCTANCE

AL value (nH/T ²)	Test conditions
2660 ± 25%	10 kHz, < 0.5 mT, 25 °C

MARKING

T EC

CORE LOSSES

P _i max	Test conditions
< 1.95 W/set (< 590 mW/cm ³)	100 kHz, 200 mT, 25 °C
< 1.85 W/set (< 560 mW/cm ³)	100 kHz, 200 mT, 100 °C

NOTE

Spec. modifications	Previous	Revised
2013-03-29		Issued