


DIMENSIONS

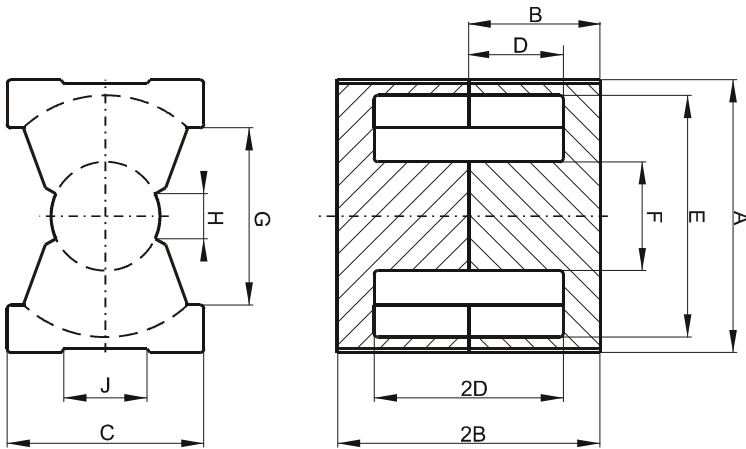

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	33.0	-0.5	+ 0.5
B	15.15	-0.13	+ 0.13
2B	30.3	-0.25	+ 0.25
C	22.0	-0.5	+ 0.5
D	10.65	-0.15	+ 0.15
2D	21.3	-0.3	+ 0.3
E	27.5	-0.5	+ 0.5
F	13.5	-0.25	+ 0.25
G	19.0 Min.		
H	5.5 Min.		
J	11.6 Min.		
Eff. Parameters			
Ae mm²	Amin mm²	le mm	Ve mm³
167.0	142.0	74.7	12500

INDUCTANCE

AL value (nH/T ²)	Test conditions
6570 ± 25%	10 kHz, < 0.5 mT, 25 °C

MARKING

0T43230UG PXXXXXXXX

CORE LOSSES

P _i max	Test conditions
< 7.5 W/set (< 600 mW/cm ³)	100 kHz, 200 mT, 100 °C
< 7.8 W/set (< 630 mW/cm ³)	100 kHz, 200 mT, 25 °C

NOTE

Spec. modifications	Previous	Revised
2013-03-29		Issued
2013-07-22	Marking: 0T43230UG PXXXXX	Marking: 0T43230UG PXXXXXXXX