




Specification for:
0W40503TC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email:magnetics@spang.com

DIMENSIONS

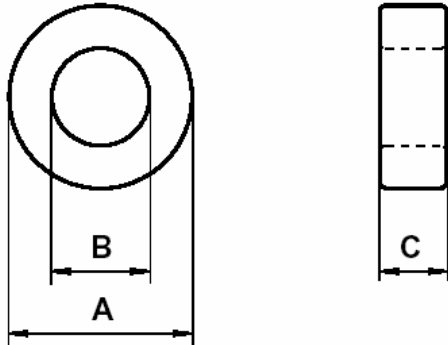

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	3.94	3.74	4.14
I.D. (B)	2.24	2.03	2.45
Ht. (C)	2.54	2.28	2.80

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
2.10	9.21	19.3

INDUCTANCE

AL value (nH/T ²)	Test conditions
2950 ± 30%	10 kHz, 0.5 mT (For N = 5, use 0.04 mA), 25°C

ELECTRICAL LOSSES

tan δ / μ _i	Production lot limit Average	Test conditions	
≤ 3.5 · 10 ⁻⁶	≤ 3 · 10 ⁻⁶	10 kHz	0.5 mT, 25°C
≤ 55 · 10 ⁻⁶	≤ 45 · 10 ⁻⁶	100 kHz	

COATING

Uncoated

NOTE

Spec. Modifications	Previous	Revised
2005.12.21	LF: General W Material	LF: Detail as indicated