


DIMENSIONS

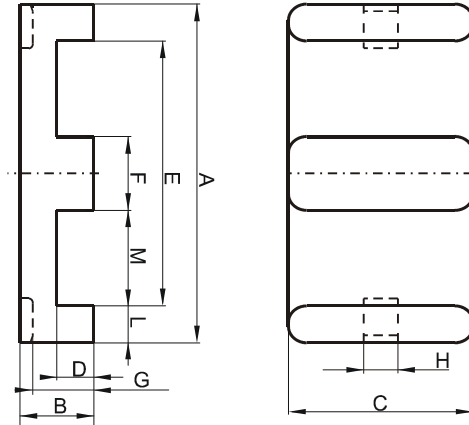

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	31.75	-0.64	+ 0.64
B	6.35	-0.13	+ 0.13
C	20.32	-0.41	+ 0.41
D	3.18	-0.2	+ 0.2
E	24.9 Min.		
F	6.35	-0.13	+ 0.13
G	5.3		
H	5.0	0.0	+ 0.2
L	3.18		
M	9.27		
Eff. Parameters			
Ae mm ²	Amin mm ²	le mm	Ve mm ³
130.0	130.0	41.4	5380

INDUCTANCE

MARKING

AL value (nH/T ²)	Test conditions	CR43208EC PXXXXX
Nom: 6521 Min.: 4891	10 kHz, < 0.5 mT, 25 °C	

CORE LOSSES

P _i max	Test conditions
< 0.48 W/set (< 89 mW/cm ³)	100 kHz, 100 mT, 100 °C
< 3.4 W/set (< 632 mW/cm ³)	100 kHz, 200 mT, 100 °C