
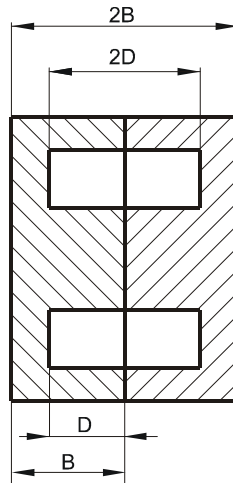


Specification for:

PF41010UG

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email: magnetics@spang.com

DIMENSIONS

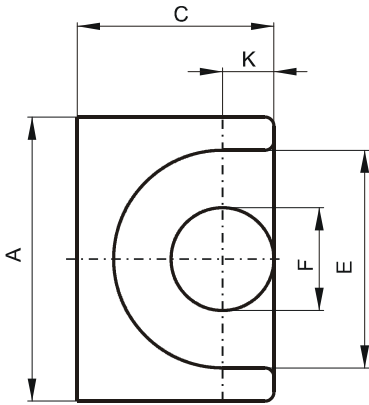

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	11.5	-0.3	+ 0.3
B	5.15	-0.1	+ 0.1
2B	10.3	-0.2	+ 0.2
C	7.6	-0.2	+ 0.2
D	3.6 MIN		
2D	7.2 MIN		
E	9.2 MIN		
F	3.45 MAX		
K	1.85	-0.1	+ 0.1
Eff. Parameters			
Ae mm ²	Amin mm ²	le mm	Ve mm ³
11.3	8.55	19.3	215

INDUCTANCE

AL value (nH)	Test conditions
Nom: 1200 Min.: 900	10 kHz, < 0.5 mT, 25 °C

MARKING

No marking

CORE LOSSES

P _i max	Test conditions
212 mW/cm ³ (0.046 W/set)	25 kHz, 200 mT, 100 °C

NOTE

Spec. modifications	Previous	Revised
2005-06-22	LOSSES:GENERAL F MATERIAL	LOSSES: DETAIL AS INDICATED