


ZF41606TC

DIMENSIONS

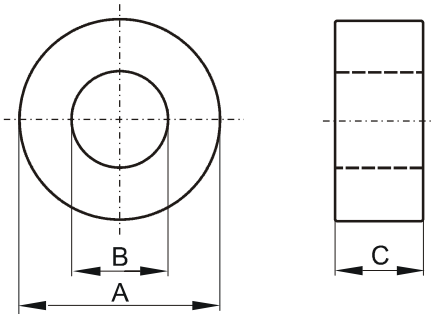

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	15.9	15.21	16.59
I.D. (B)	9.07	7.92	9.72
Ht. (C)	5.7	5.5	6.4
Eff. Parameters			
Ae mm²	le mm	Ve mm³	
18.96	37.2	706	

INDUCTANCE

AL value (nH/T ²)	Test conditions
1920 ± 20%	10 kHz, 0.5 mT (For N=5, use 0.6 mA), 25°C

CORE LOSSES

P _i max	Production lot limit Max avg	Test conditions
< 155 mW (< 220 mW/cm ³)	< 141 mW (< 200 mW/cm ³)	25 kHz, 200 mT, 100 °C

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 1000 V Min Wire-to-Wire

NOTE

Spec. modifications	Previous	Revised
2013-02-11		Issued