


DIMENSIONS

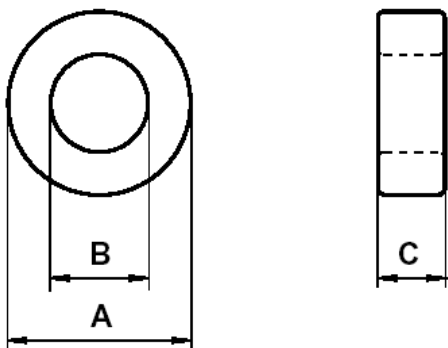

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	36	35.35	37.15
I.D. (B)	23	22.05	23.45
Ht. (C)	9.8	9.75	10.65

Eff. Parameters		
A_e mm ²	l_e mm	V_e mm ³
62.6	89.7	5616

INDUCTANCE

A_L value (nH/T ²)	Test conditions	
4543 ± 20%	10 kHz	0.5 mT (For N = 1, use 4.1 mA), 25°C
≥ 0.9 x A_L @ 10 kHz	200 kHz	

ELECTRICAL LOSSES

$\tan \delta / \mu_i$	Test conditions
≤ 15 · 10 ⁻⁶	100 kHz, 0.5 mT, 25°C

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 2000 V Min Wire-to-Wire.

NOTE

Spec. Modifications	Previous	Revised
2005.05.26	Bare Nom Ht = 10 OD Max = 36.89 ID Min = 22.12 LF: General J Material Breakdown voltage > 1,000 V	Bare Nom Ht = 9.8 OD Max = 37.15 ID Min = 22.05 LF: Detail as indicated Breakdown voltage > 2,000 V
2005.09.26	A_L value up to 200 kHz	A_L at 200 kHz ≥ 0.9 x A_L at 10 kHz