




Specification for:
ZR41003TC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email: magnetics@spang.com

DIMENSIONS

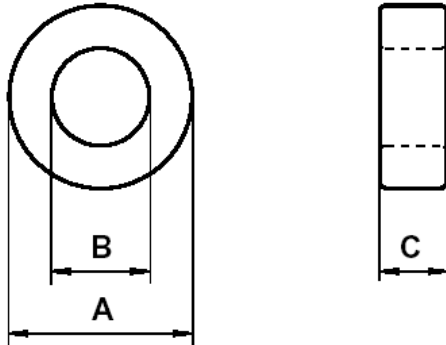

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	9.53	9.38	10.17
I.D. (B)	4.75	4.2	4.8
Ht. (C)	3.18	3.13	3.73

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
7.3	20.7	151

INDUCTANCE

AL value (nH/T ²)	Test conditions
1000 ± 25%	10 kHz, 0.5 mT (For N = 5, use 0.4 mA), 25°C

CORE LOSSES

P _L max	Production lot limit Max avg	Test conditions
16.6 mW (110 mW/cm ³)	15.1 mW (100 mW/cm ³)	100 kHz, 100 mT, 100°C
108 mW (715 mW/cm ³)	98.2 mW (650 mW/cm ³)	100 kHz, 200 mT, 100°C

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 1000V Min Wire-to-Wire.

NOTE

Spec. Modifications	Previous	Revised
2006.01.05	Losses: General R material	Losses: Detail as indicated