




Specification for:

ZR42207TC

110 Delta Drive
 Pittsburgh, PA 15238
 Phone: 412/696-1333
 Fax: 412/696-0333
 Email:magnetics@spang.com

DIMENSIONS

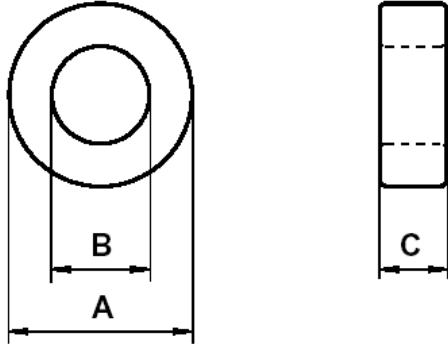

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	22.1	21.84	22.86
I.D. (B)	13.7	12.95	13.95
Ht. (C)	7.8	7.84	8.56

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
32.1	54.1	1740

INDUCTANCE

AL value (nH/T ²)	Test conditions
1720 ± 25% nH/T ²	10 kHz, 0.5 mT (For N = 5, use 1.1 mA), 25°C

CORE LOSSES

P _L max	Production lot limit Max avg	Test conditions
194 mW (112 mW/cm ³)	176 mW (102 mW/cm ³)	100 kHz, 100 mT, 100°C
1.26 W (726 mW/cm ³)	1.15 mW (660 mW/cm ³)	100 kHz, 200 mT, 100°C

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 1500 V _{DC} min Wire-to-Wire.

NOTE

Spec. Modifications	Previous	Revised
2006.06.22	Bare Nom Ht = 7.92 Losses: General R material Breakdown voltage > 1,000 V	Bare Nom Ht = 7.8 Losses : Detail as indicated Breakdown voltage > 1,500 V _{DC}