


DIMENSIONS

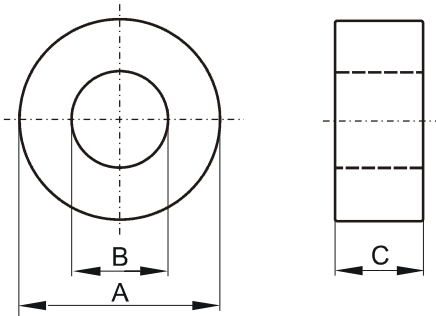

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	12.70	12.56	13.34
I.D. (B)	8.14	7.29	8.49
Ht. (C)	6.35	6.29	6.91
Eff. Parameters			
Ae mm²	le mm	Ve mm³	
14.2	31.7	451	

INDUCTANCE

AL value (nH/T²)	Test conditions
1700 ± 25%	10 kHz, 0.5 mT (For N=1, use 2.47 mA), 25°C

CORE LOSSES

P_i max	Production lot limit Max avg	Test conditions
< 0.32 W (< 710 mW/cm ³)	< 0.293 W (< 650 mW/cm ³)	100 kHz, 200 mT, 25 °C
< 0.3 W (< 665 mW/cm ³)	< 0.276 W (< 620 mW/cm ³)	100 kHz, 200 mT, 100 °C

COATING

Epoxy rated for 200°C continuous operation
Voltage breakdown rating 1500V Min Wire-to-Wire

NOTE

Spec. modifications	Previous	Revised
2013-06-06		Issued