


DIMENSIONS

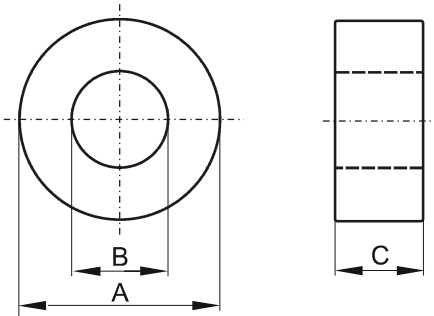

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	22.1	21.84	22.86
I.D. (B)	13.7	12.95	13.95
Ht. (C)	6.25	6.39	6.91
Eff. Parameters			
Ae mm²	le mm	Ve mm³	
25.8	54.1	1395	

INDUCTANCE

AL value (nH/T²)	Test conditions
1790 ± 25%	10 kHz, 0.5 mT (For N=5, use 0.85 mA), 25°C

CORE LOSSES

P_i max	Production lot limit Max avg	Test conditions
< 0.892 W (< 640 mW/cm ³)	< 0.85 W (< 610 mW/cm ³)	100 kHz, 200 mT, 25 °C
< 0.857 W (< 614 mW/cm ³)	< 0.816 W (< 585 mW/cm ³)	100 kHz, 200 mT, 100 °C

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 1500 V Min Wire-to-Wire

NOTE

Spec. modifications	Previous	Revised
2013-02-07		Issued