




Specification for:
ZW41610TC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email:magnetics@spang.com

DIMENSIONS

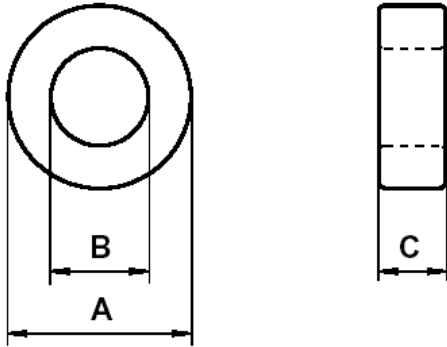

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	15.9	15.46	16.84
I.D. (B)	9.07	8.1	10.04
Ht. (C)	9.40	8.64	10.16

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
31.3	37.2	1164

INDUCTANCE

AL value (nH/T ²)	Test conditions
10600 ± 30%	10 kHz, 0.5 mT (For N = 5, use 0.174 mA), 25°C

ELECTRICAL LOSSES

tan δ / μ _i	Production lot limit Average	Test conditions	
≤ 3.5 · 10 ⁻⁶	≤ 3 · 10 ⁻⁶	10 kHz	0.5 mT, 25°C
≤ 55 · 10 ⁻⁶	≤ 45 · 10 ⁻⁶	100 kHz	

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 1000 V _{DC} Min Wire-to-Wire.

NOTE

Spec. Modifications	Previous	Revised
2007.05.02	LF: General W material	LF: Detail as indicated