




Specification for:
0F40601TC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email:magnetics@spang.com

DIMENSIONS

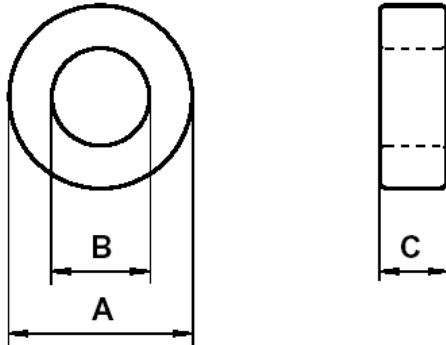

(mm)	Uncoated Nominal:	Min:	Max:
O.D. (A)	5.84	5.55	6.13
I.D. (B)	3.05	2.76	3.34
Ht. (C)	1.52	1.33	1.71

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
2.0	13	26.7

INDUCTANCE

AL value (nH/T ²)	Test conditions
585 ± 20%	10kHz, 0.5 mT (For N = 5, use 0.2 mA), 25°C

CORE LOSSES

P _L max	Production lot limit Max avg	Test conditions
5.9 mW (220 mW/cm ³)	5.3 mW (200 mW/cm ³)	25 kHz, 200 mT, 100°C
-	-	-

COATING

Uncoated

NOTE

Spec. Modifications	Previous	Revised
2006.01.12	Losses: General F material	Losses: Detail as indicated